


# Installation Instructions

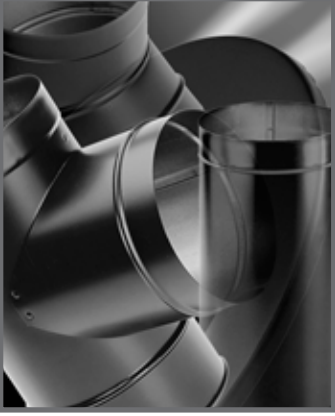

Single-wall interior stovepipe for connecting wood stoves to manufactured chimney

# DURABLACK

**A MAJOR CAUSE OF VENT RELATED FIRES IS FAILURE TO MAINTAIN REQUIRED CLEARANCES (AIR SPACES) TO COMBUSTIBLE MATERIALS. IT IS OF THE UTMOST IMPORTANCE THAT DURABLACK BE INSTALLED ONLY IN ACCORDANCE WITH THESE INSTRUCTIONS.**

**NOTE:**

**Read through all of these instructions before beginning your installation. Failure to install as described in this instruction will void the manufacturer's warranty, and may have an effect on your homeowner's insurance. Keep these instructions for future reference.**

**NOT A UL LISTED PRODUCT**

**Dear Customer, Installer, or End User:**

We welcome any comments regarding matters pertaining to our DuraVent products.

We welcome any ideas, input or complaints and I'll make sure that someone responds directly back to you.

Send your emails to:

[president@duravent.com](mailto:president@duravent.com)

If you are searching for tech support or product information, please phone us at 800-835-4429.

Or email us at:

[techsupport@duravent.com](mailto:techsupport@duravent.com)

**IMPORTANT**

***DuraBlack must be installed with at least an 18" Clearance to Combustibles.***

Read all instructions carefully before starting the installation. The DuraVent warranty will be voided, and serious fire, health, or other safety hazards may result from any of the following actions:

- Installation of any damaged DuraBlack component.
- Unauthorized modification of any DuraBlack component
- Installation of any component part not manufactured or approved by DuraVent.
- Installation other than as instructed by DuraVent and the appliance manufacturer. Consult your local building codes before beginning the installation.

**INSTALLATION PROCEDURE**

**Step 1.** Insert the Slip Connector section of pipe into the previously installed Ceiling Support Box. Position it so the seams are facing the wall, and the smooth side is facing the room. Push it in firmly, until the locking notches engage the top of the rim of the hole in the support box. ***It is extremely important that the Support Box be positioned so that the single wall pipe is at least 18" from the combustible wall, and also that the support box protrudes at least 2" below the ceiling.*** Reposition the Support Box if necessary, to meet these two requirements.

**Step 2.** If you are installing the optional Trim Collar, slide the Trim Collar upwards over the Slip Connector, until it is next to the bead. Using the two, pre-punched holes in the Trim Collar as a guide, drill two 1/8" diameter holes in the Support Box. Screw the Trim Collar to the Support Box, using the two sheet metal screws provided with the kit.

**Step 3.** Slide the first Pipe Section upwards


over the Slip Connector. Rotate it so the seam is facing the wall. Push the Pipe Section upwards about 1 inch, so it will be held in place by the Slip Connector. The Slip Connector slides inside the pipe.

**Step 4.** Install the second Pipe Section (with seam facing the wall) on the stove collar (or the appliance adapter (whichever is appropriate for your installation)). Note that the bottom of the Pipe Section goes inside the stove collar or appliance adapter.

**Step 5.** You are now ready to connect the top and bottom Pipe Sections. Align the pipe system vertically so the Pipe Sections align together. Adjust the pipe assembly for height by pushing upwards against the top Pipe Section. The top Pipe Section will slide up the outside of the Slip Connector (up to approximately 10" of adjustment). Drop the top Pipe Section down into the lower Pipe Section. No cutting is required. If possible, fasten the pipe assembly to the appliance with screws. Should the stove not readily accommodate the pipe system, the DuraVent Catalog has a variety of adaptors.

**Step 6.** To insure the safety of the installation and to increase the rigidity of the system, use 3 sheet metal screws equally spaced around each joint. Drill three 1/8" holes around the circumference of each joint, and screw in the sheet metal screws. This is especially important if there are any elbows in the system.

**Note:** If 90 degree elbows are used in the system, no drip-free representation may be made. Single wall elbows inherently have a certain amount of spacing at the joints, which may in some cases permit creosote leakage.

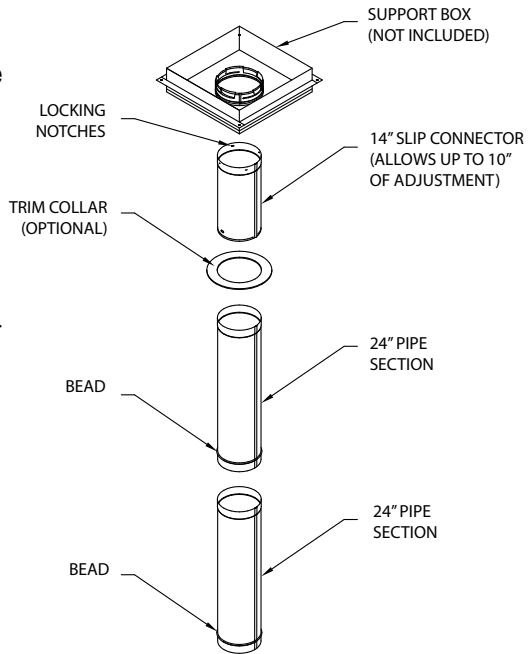

If the ceiling is higher than 8 feet, obtain Pipe Sections from your dealer to accommodate the additional height. Pipe Sections are available in 1', 2' and 4' lengths. (10" diameter pipe available in 1' and 2' lengths only)

**Note:** DuraBlack pipe will exhibit a moderate paint-like odor during the first few uses. This is normal curing of the finish and will disappear after a few uses of the appliance.

## M&G DURAVENT WARRANTY

M&G DuraVent, Inc. ("DuraVent") provides this limited lifetime warranty for all of its products to the original purchaser, with the exception of Ventinox (lifetime), DuraBlack (five years) and all Termination Caps (five years). Subject to the limitations set forth below, DuraVent warrants that its products will be free from substantial defects in material or manufacturing, if properly installed, maintained and used. This Warranty is non-transferable with the exception of Ventinox which is transferable from the original homeowner to the buyer of the home for a period of ten (10) years. This warranty does not cover normal wear and tear, smoke damage or damage caused by chimney fires, acts of God, or any product that was: (1) purchased other than from an authorized DuraVent dealer, retailer or distributor; (2) modified or altered; (3) improperly serviced, inspected or cleaned; or (4) subject to negligence or any use not in accordance with the printed materials provided with the product as determined by DuraVent. This limited lifetime warranty applies only to parts manufactured by DuraVent.

DuraVent provides the following warranties for its products: One Hundred Percent (100%) of the purchase price or MSRP at time of purchase, whichever is lower, for 15 years from the date of purchase, and Fifty Percent (50%) thereafter, except for the following limitations: Ventinox liner and components in wood, oil, wood pellet, and gas installations are warranted at One Hundred Percent (100%) for the lifetime of the original homeowner; Ventinox 316 liner and components for coal burning installations which are warranted One Hundred Percent (100%) for ten years; all Termination Caps and DuraBlack® are warranted at One Hundred Percent (100%) for five years, and at Ten Percent (10%) thereafter.

All warranty obligations of DuraVent shall be limited to repair or replacement of the defective product pursuant to the terms and conditions applicable to each product line. These remedies shall constitute DuraVent's sole obligation and sole remedy under this limited warranty. This warranty provides no cash surrender value. The terms and conditions of this limited lifetime warranty may not be modified, altered or waived by any action, inaction or representation, whether oral or in writing, except upon the express, written authority of an executive officer of DuraVent.

### VENTINOX WARRANTY CONDITIONS

Liner and Component warranties contained herein are subject to the following conditions: (1) The Liner and Components must be installed according to DV's installation instructions; (2) The Liner and Components are used only to line or reline chimneys venting residential appliances for which the liner was intended; and (3) documented annual inspection of the Liner and Components and maintenance as deemed necessary, beginning one year after the date of installation and continuing throughout the warranty period, by a Nationally Certified Chimney Sweep or VENTINOX® installer. The Liner and Components warranty is further subject to compliance with the following requirements throughout the warranty period: The chimney must have a chimney cap and chemical chimney cleaners must not be used when cleaning the Liner or Components. Plastic-bristle flue cleaning brushes are recommended. Com, biofuels, driftwood or other wood containing salt, preservative-treated lumber, plastic and household trash or garbage, or wood pellets containing such materials must not be burned in the appliance or fireplace. In case of a chimney fire, the chimney must be inspected and approved by a certified Chimney Sweep before reuse. After each annual inspection, maintenance, and cleaning, the certified Chimney Sweep must fill out and date the appropriate section of the warranty card provided with the chimney liner.

### LIMITATIONS ON INTERNET SALES:

Notwithstanding any other terms or conditions of this limited lifetime warranty, DuraVent provides no warranty for the following specific products if such products are both: (a) purchased from an Internet seller; and (b) not installed by a qualified professional installer: DuraTech®, DuraPlus HTC®, PelletVent Pro®, FasnSeal®, and DuraVent's relining products including DuraLiner®, DuraFlex® 304, DuraFlex® 316, DuraFlex® Pro, DuraFlex® SW, and Ventinox®. For purposes of this warranty, a trained professional installer is defined as one of the following: licensed contractors with prior chimney installation experience, CSIA Certified Chimney Sweeps, NFI Certified Specialists, or WETT Certified Professionals.

DuraVent reserves the right to inspect defective product to determine if it qualifies for replacement under the terms of this limited lifetime warranty. All warranty claims must be submitted with proof of purchase. Labor and installation costs are not covered under this warranty. To obtain warranty service contact DuraVent promptly at DuraVent Warranty Service, 902 Aldridge Rd., Vacaville CA 95688, or call 800-835-4429.

WHERE LAWFUL, DuraVent DISCLAIMS ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL DuraVent BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR SPECIAL DAMAGES OR DIRECT OR INDIRECT LOSS OF ANY KIND, INCLUDING BUT NOT LIMITED TO PROPERTY DAMAGE AND PERSONAL INJURY. DuraVent's ENTIRE LIABILITY IS LIMITED TO THE PURCHASE PRICE OF THIS PRODUCT. SOME STATES DO NOT ALLOW LIMITATIONS ON IMPLIED WARRANTIES, OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY FROM STATE TO STATE.

For the most up-to-date installation instructions, see [www.duravent.com](http://www.duravent.com)  
REV 7.20.2010

M&G DuraVent, Inc. PO Box 1510 Vacaville CA 95696-1510  
Manufactured in Vacaville CA and Albany NY

# DuraVent

Member of  M&G Group

**Customer Service Support 800-835-4429 707-446-4740 FAX [www.duravent.com](http://www.duravent.com)**

DuraBlack is a registered trademark of the M&G DuraVent, Inc.

All rights reserved. Made in the USA. M&G DuraVent is a member of M&G Group. ©2011

L122 03/2011